

PRO 1800A

Time Attendance And Access Control

Long Range Face Recognition 3D Face Detection

7inch Screen With Dual Camera



Specifications :

Face capacity	: 20000
Template Storage Capacity	: 100000 users in 1:1 mode
Fingerprint capacity	: 50000 (Largest Capacity in Market)
Fingerprint with Mifare Card capacity	: 255000 users in 1:1 mode
Finger Template Per Users	: Up to 10 (Single Template Per Finger Mode)
Storage capacity	: 1000000 Transaction Logs
Recognition way	: Face, Mifare Card, Password, Fingerprint
Face intelligent update function	: Yes
CPU	: Quad-core, 1.7G
Internal storage capacity	: 512MB RAM, 512MB Flash
OS	: LINUX
Operating Principal	: FTIR
Camera	: Dual camera (High resolution infrared and color dual cameras & Sensor)
IR Resolution	: 1024 x 600
Image Resolution	: 500 dpi
Display	: 7inch HD LCD Touch Screen
Infrared approach receiver	: Yes
Communication	: TCP/IP, USB 2.0,U-disk, WIFI, RS485, 4G, Wiegand In & Out
FRR	: <= 0.0001%
FAR	: <= 0.1%
Light Condition	: 0 - 20000 Lux
Active Sensing Area	: 1.6" x 1.6"
Voice	: Yes
Clock RTC	: Yes
Working voltage	: DC12V voltage design
Working temperature	: -10°C -50°C
Working humidity(RH)	: 20% ~ 80%
Alarm	: Alarm output
Tamper Alarm	: Yes
Push Data	: Yes
Wiegand	: 1 group of WG26/34 input,External reader available, - 1 group of WG26/34 output
Working Distance	: Min. 5 Feet
Certifications	: CE , FCC, BIS

Accessories



RF Reader



Exit Button




Electronic Lock



Sensor



Alarm

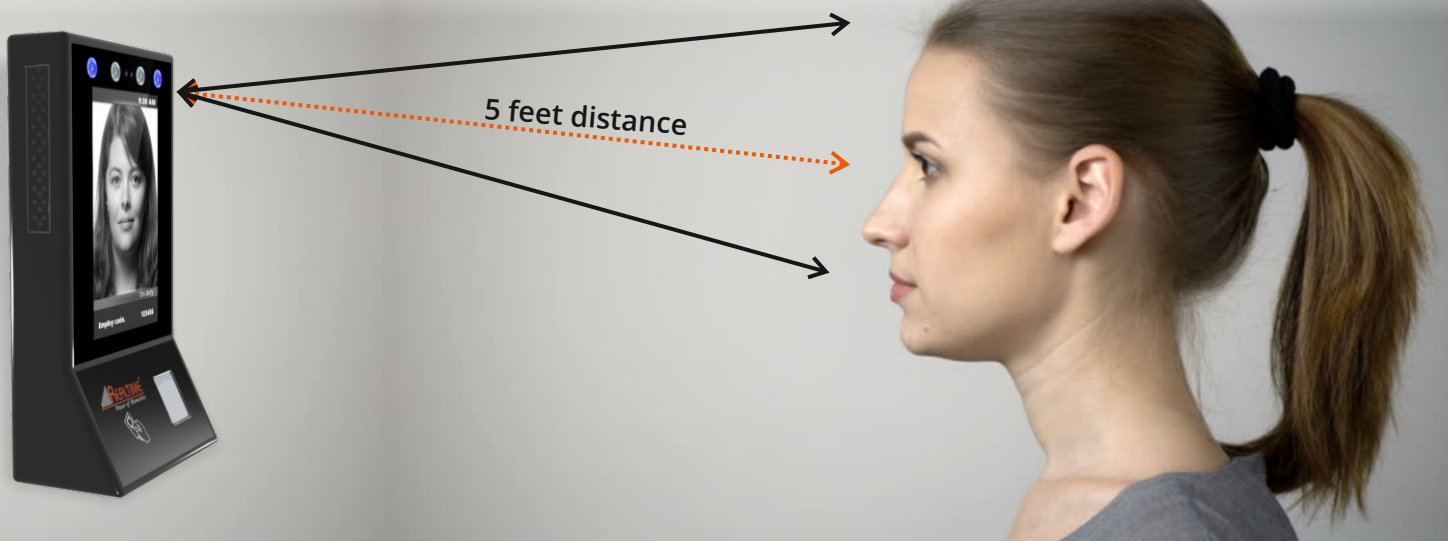

Lang range detection



Live face



Fingerprint



Card



Touch Screen



Access Control



4G (Optional)



WiFi